


AUXILIARY SPRAYER TANK

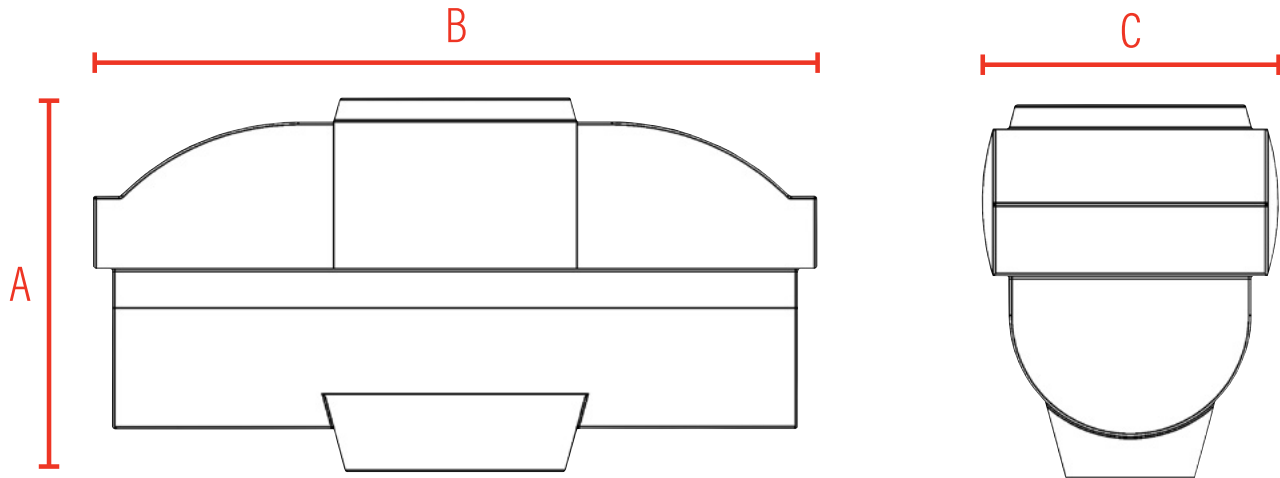

AUXILIARY SPRAYER TANK SPECIFICATIONS

CAPACITY		SPECIFICATIONS					
IMP. GAL.	U.S. GAL.	Height A	Length B	Width C	LID SIZE	STANDARD FITTING	PART NUMBER
200	240	45- ³ / ₄ "	77- ¹¹ / ₁₆ "	27- ³ / ₈ "	16"	2" HD	1179
175	210	43"	63- ¹ / ₂ "	27- ³ / ₈ "	16"	2" HD	1611
125	150	30- ⁹ / ₁₆ "	63- ¹ / ₂ "	27- ³ / ₈ "	16"	2" HD	1035

- Auxiliary sprayer tanks are available in translucent white and black.
- All translucent and black tanks are potable and manufactured from materials that meet FDA Regulations 21 CFR 177.1520 and may be used to contain materials for human consumption.
- All tanks have greater than UV20 protection to prevent deterioration from sunlight.
- Tanks come standard with 16" vented lid, bulkhead fitting and built-in sump for more complete drainage.
- Auxiliary Sprayer Tanks are typically used to contain liquids with densities up to 14 lb per gallon.
- Auxiliary Sprayer tanks carry a 1 Year Warranty against defects in workmanship.